


THz Spectral Splitters

Tydex offers spectral splitters for applications where NIR or MIR radiation has to be reflected without transmission degradation in THz range.

NIR-THz spectral splitter is used for separation of pump radiation (centered in the wavelength range 790-800 nm) from THz radiation in Ti:Sapphire laser and MIR-THz spectral splitter for separation of pump radiation (9.6 μm and 10.6 μm) from THz radiation in THz laser optically pumped by CO_2 -laser.

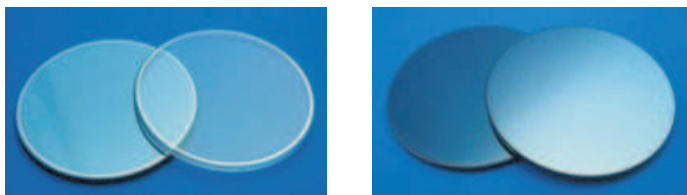

Common specification:

Type	NIR-THz spectral splitter	MIR-THz spectral splitter
Material of substrate	- HRFZ-Si - THz-grade crystal quartz	
Dimensions tolerance, mm	+/-0.25	
Clear aperture, %	90	
Surface quality, scr/dig	60/40	
Surface accuracy, mm	+/-0.01 deviation from ideal plane	
Coating	High-reflection dielectric coating (R>90%) @ 730-860 nm	High-reflection dielectric coating (R>90%) @ 9-11 μm
Angle of incidence, arc. grad:	45	

The following THz spectral splitters are available from stock:

No.	Diameter		Thickness mm
	mm	inches	
1	25.4	1.0	1.0
2	50.8	2.0	1.0

Please check the Optics stock at our website.
Custom designs are available upon request.
For price quotation and delivery please fax or e-mail us.

Typical reflection and transmission curves

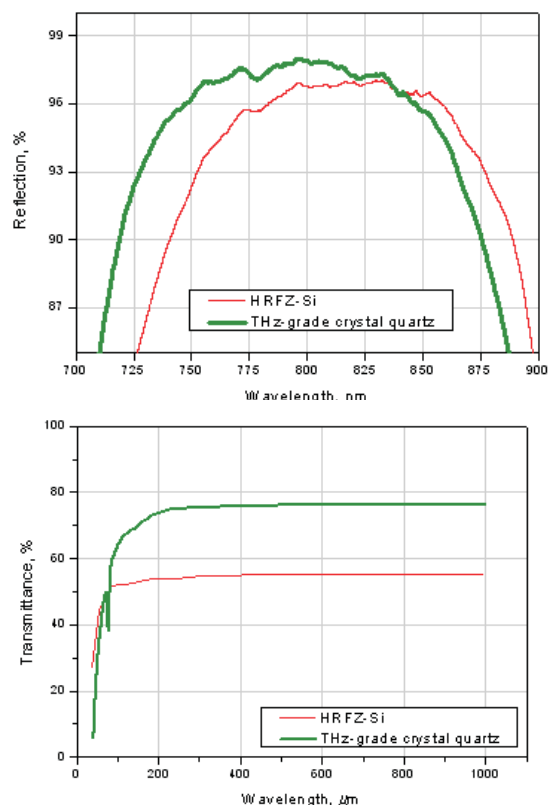


Fig. 1, 2 Reflection and transmission of NIR-THz spectral splitter (two types of substrate).

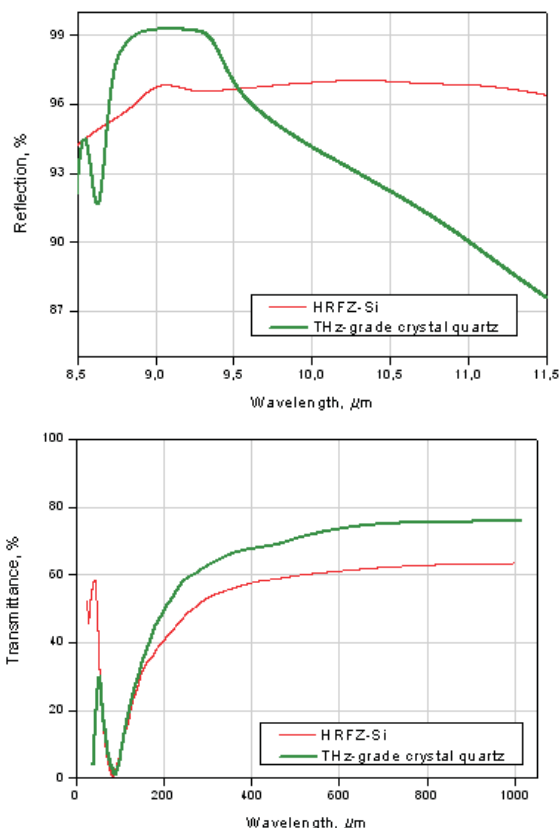


Fig. 3, 4 Reflection and transmission of MIR-THz spectral splitter (two types of substrate).



TYDEX[®]
J.S.C.O.

Domostroitelnaya str. 16, 194292 St.Petersburg, RUSSIA
Tel: 7-812-3346701, -3318702; Fax: 7-812-3092958
E-mail: optics@tydex.ru, URL: <http://www.tydex.ru>