


HF series

Fiber coupled QCW single diode bar module

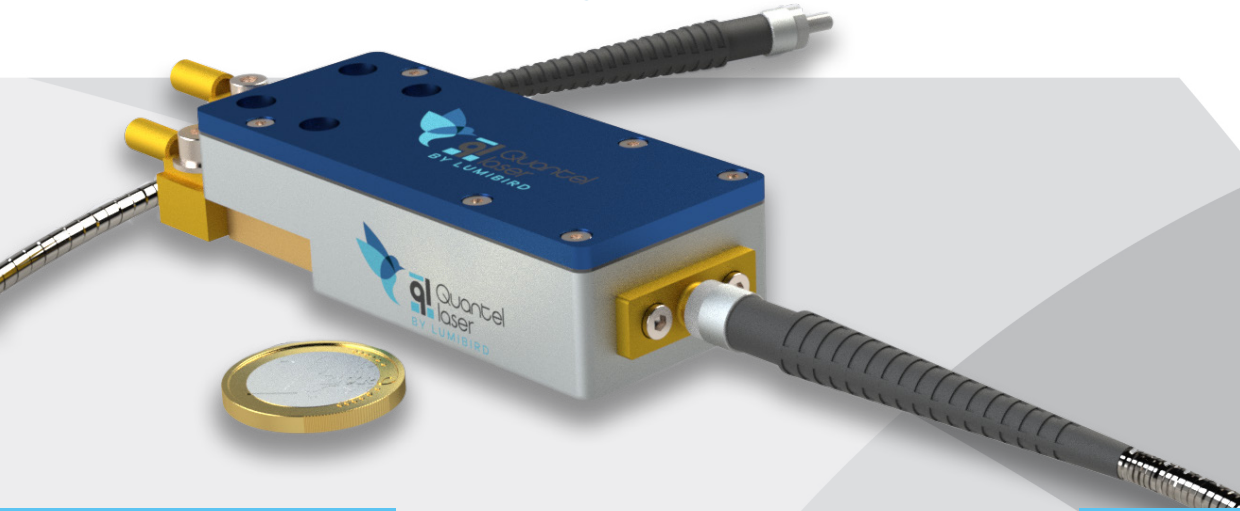

MAIN FEATURES

- Compact
- High peak power
- High coupling efficiency
- Field replaceable fiber
- Conductive cooling
- Shock and vibration resistant

MAIN APPLICATIONS

- MEDICAL
- OPTICAL PUMPING
- INDUSTRIAL

SPECIFICATIONS

	HF06
Wavelength at 25°C (nm) ⁽¹⁾	808 +/-10 ⁽²⁾
Spectral width (nm)	< 5
Output optical power (W)	150
Pulse width (µsec)	200
Pulse repetition rate (Hz)	see fig.1
Duty cycle (%)	2
Operating current (A) ⁽³⁾	175
Operating voltage (V)	< 2.5
Efficiency (%)	> 40
Output optical fiber core (mm)	0.6
Output fiber numerical aperture	0.22
Fiber length (m)	2
Connector	SMA 905
Dimensions (H x L x W) in mm	21 x 100 x 34
Operating temperature	20°C to 30°C, 25°C typical
Cooling	conduction

(1) Variation of wavelength with temperature is approximately 0.3 nm / °C

(2) Other wavelengths on request

(3) Final value is provided with test data


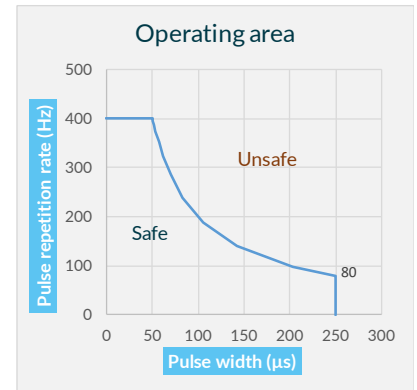


Figure 1



www.quantel-laser.com

Many options and configurations are available. Please contact Lumibird to find the best match for your needs and compatibility between options.



Lumibird has locations across the globe that are available to provide support for any product, service or inquiry. Visit www.lumibird.com to connect with any of our global sites.

